

DBM

AG

Principal


Primary Replica

mirror


Secondary Replica

M8S3

Terminology
Comparisons
between DBM and
AGs

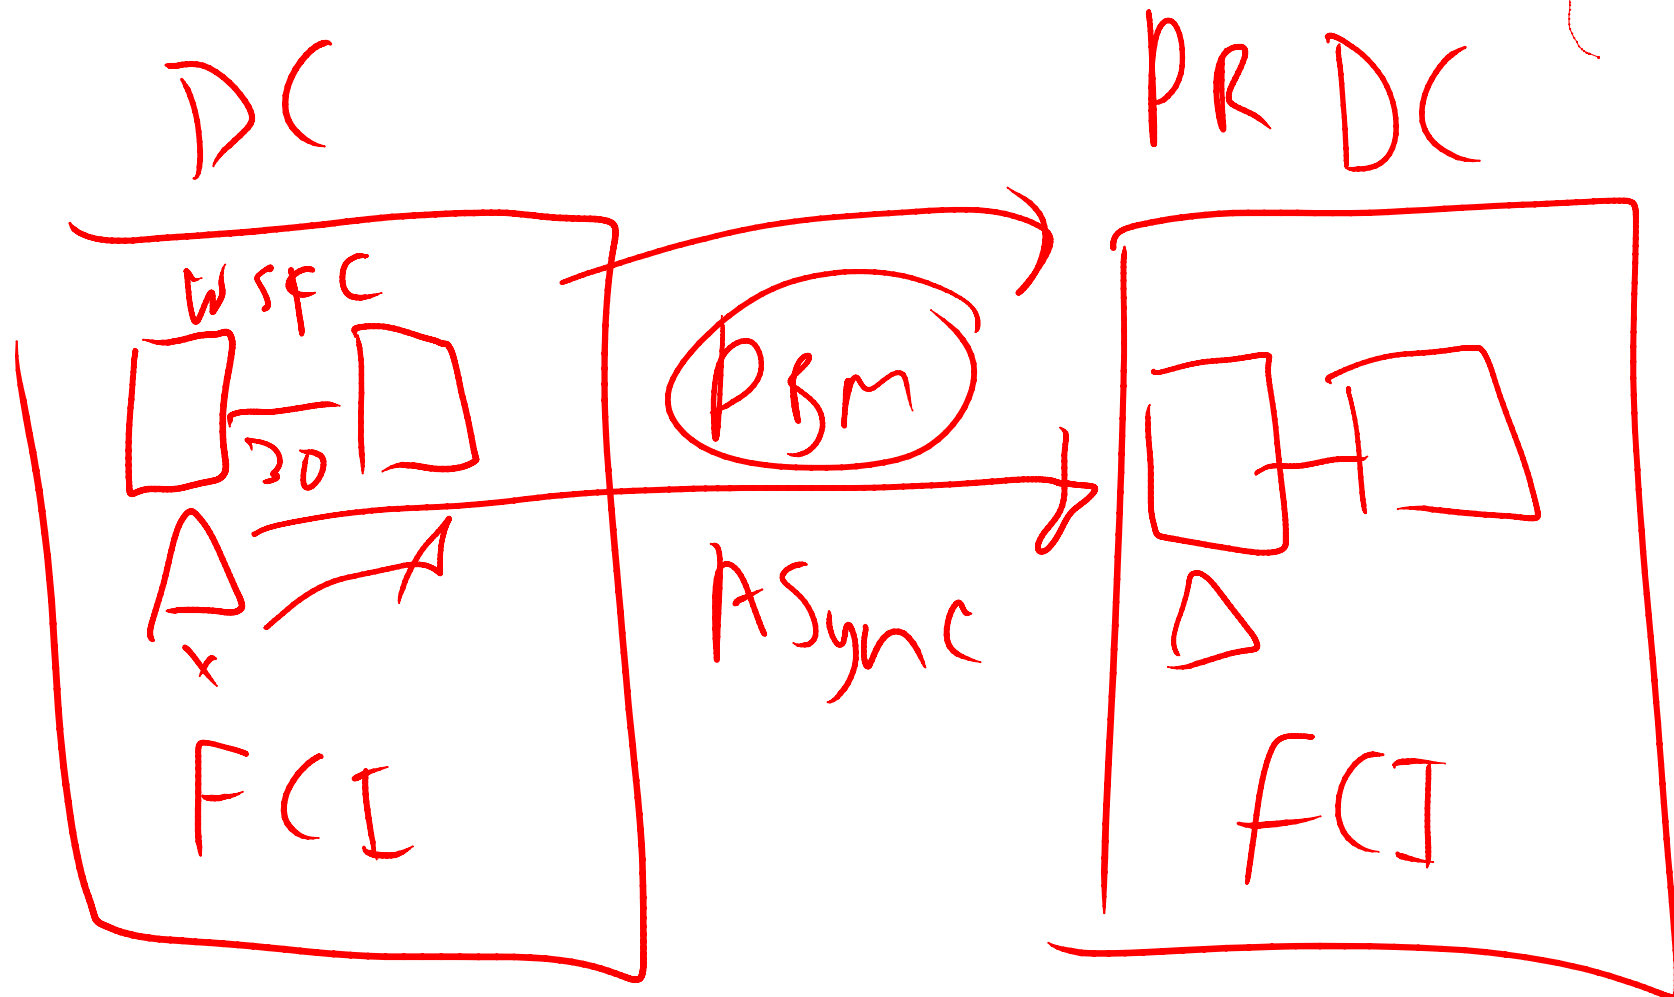

M8 S4
Local SQL FCIs for HA
+ Database Mirroring for DR

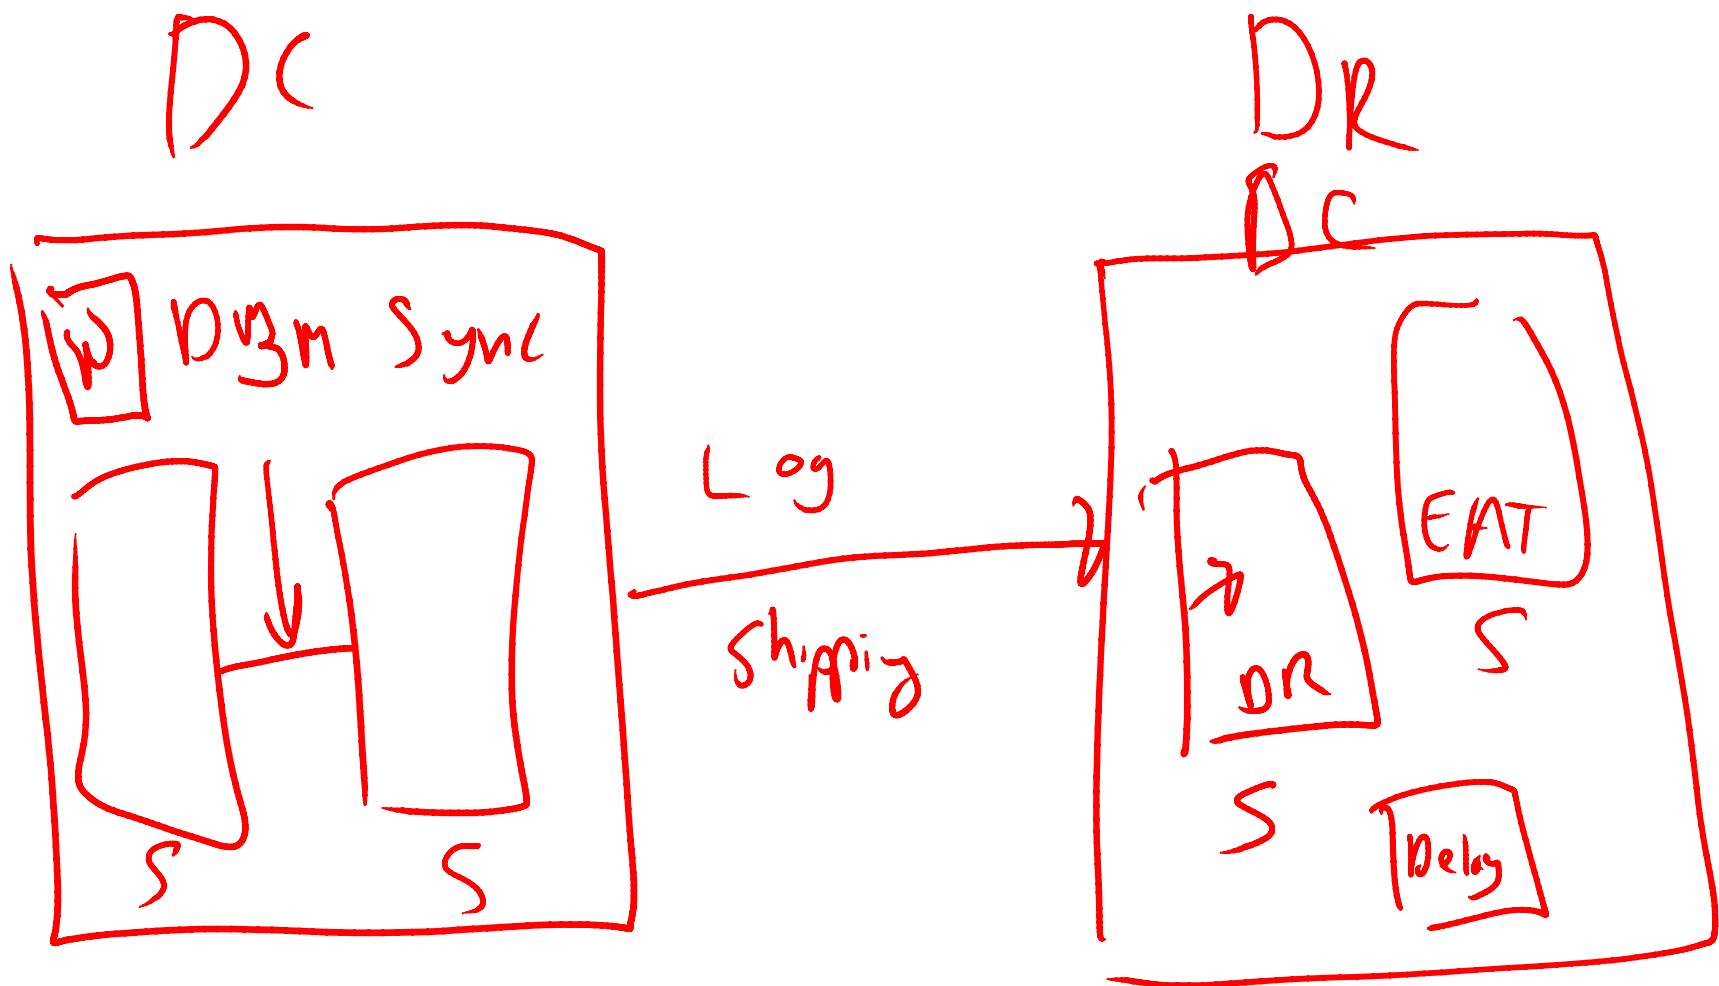

M8 S4

Synch Database Mirroring for local HA

+Log Shipping for DR

Non-Shared Storage, Five SQL instances

M8 S4

Each node of a Windows Server Failover Cluster can have a non-shared disk storage, stand-alone SQL Server instance. One primary and multiple secondaries (up to 4). Three can be sync, the rest async, and two automatic failover.



M9 S58

A thread in execution can be running, waiting, or runnable. Lightening talk on waits and queues for the Replication wait stats demo.

