


update + set $sal = sal \times .10$

where sal

$> 100,000$

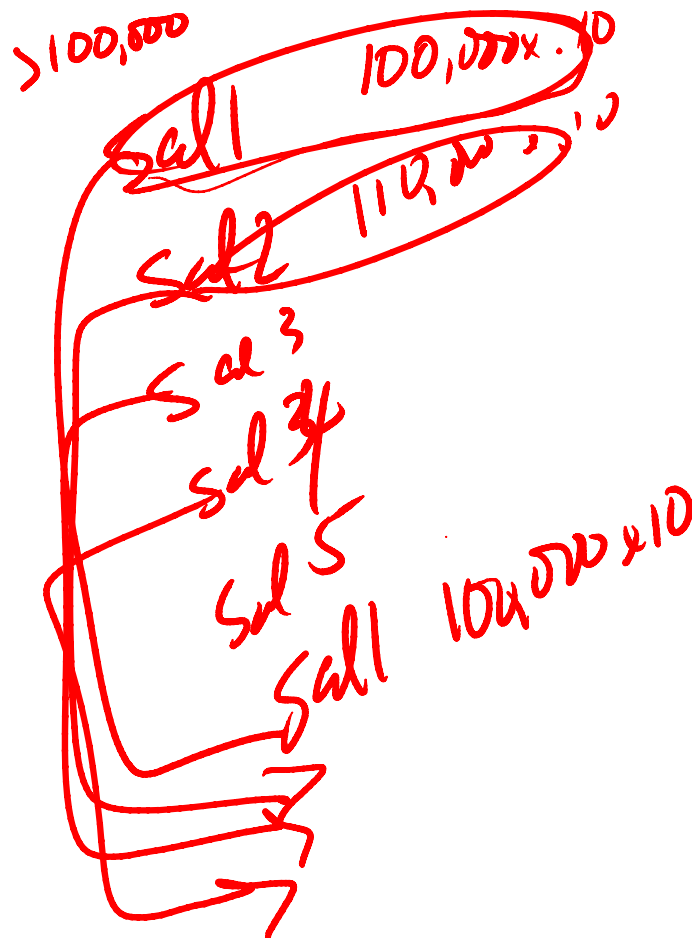

Module 8: Query Plan Analysis

Halloween Protection example – two cursors were used, a read and update, with the SQL statement:

```
UPDATE tbl SET sal = sal*.10 WHERE sal > 10000;
```

As the updates to sal occurred, the read cursor was updated, so updated rows were read and updated again.