
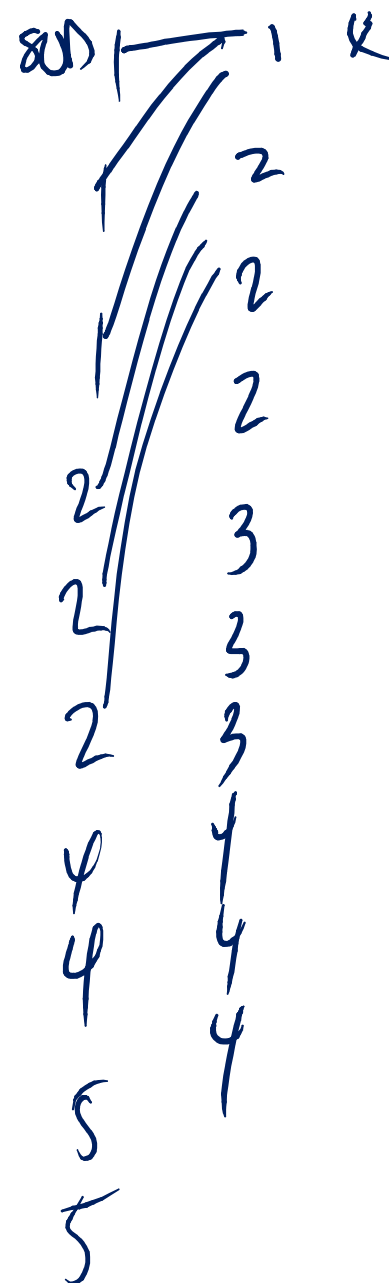
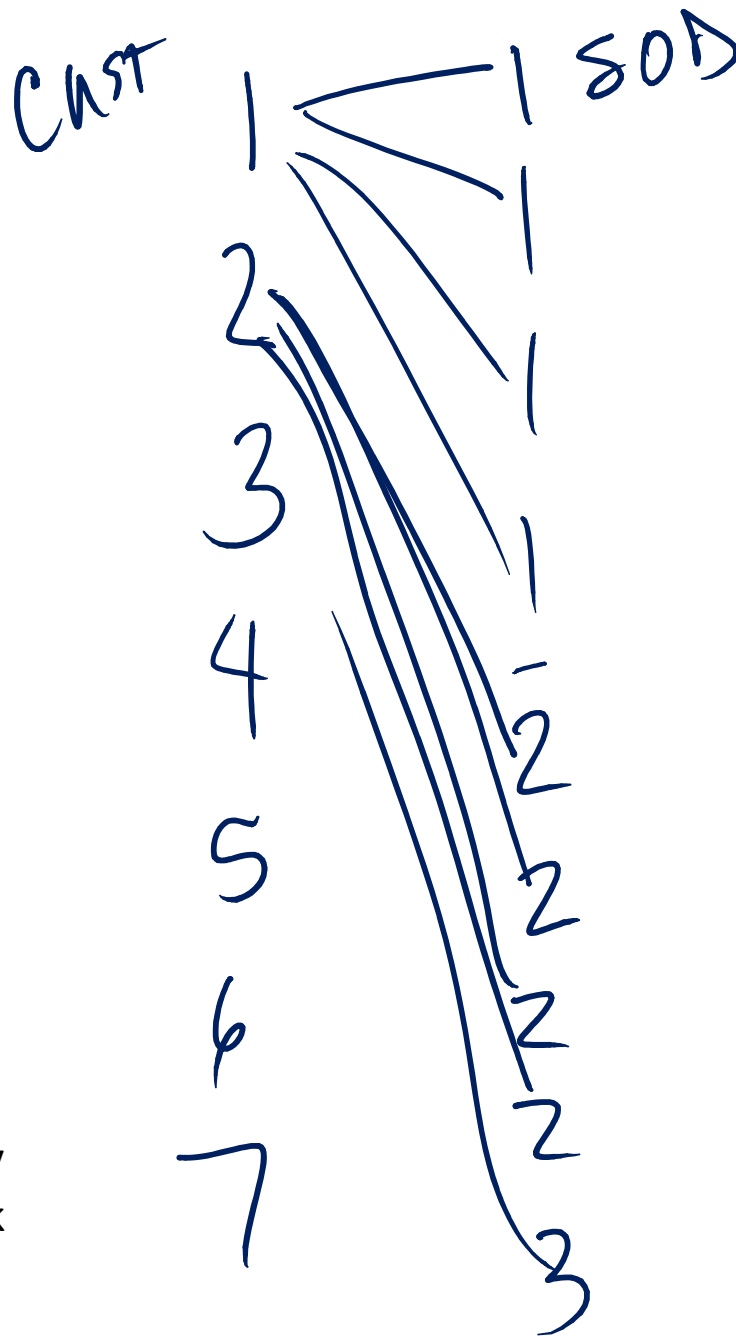


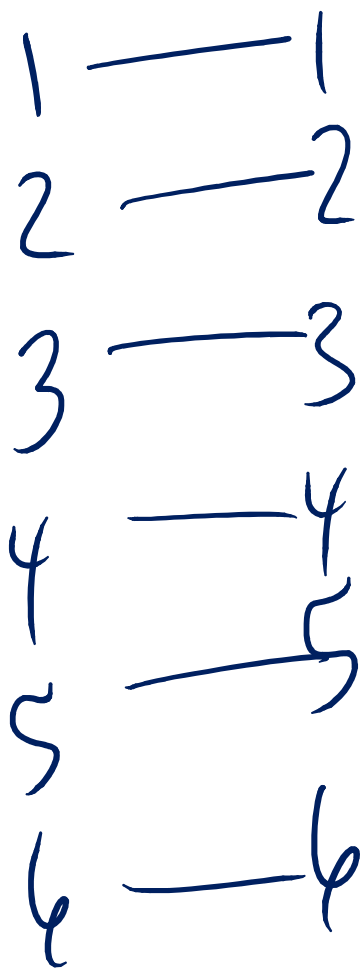

Example of (L to R), one to one, one to many, and many to many scenario in a MERGE JOIN. Look for this info in the operator properties.

update emp set sal = sal + ~~10K~~^{5K}

where sal < 40K

Index
sal, empid

~~25~~ → 30
~~27~~ → 32
~~29~~ → 34
~~30~~ → 35
31 → 36
32 → 37
33 → 38
34 → 39
35 → 40

Discussion of the Halloween problem, where the write cursor was updating the read cursor (and in this example, EVERYONE with a salary under 40K ended up with at least 40K (more than just a 5K bump)).